


RESISTOR VALUES SHOWN IN OHMS  
CAPACITOR VALUES IN MICRO-MICROFARADS  
EXCEPT WHERE OTHERWISE SHOWN  
VOLTAGES MEASURED ON A METER OF 1000Ω/VOLT

**SWITCHES**  
 SW1 INPUT SELECTOR SWITCH  
 SWB BASS SWITCH  
 SWT TREBLE SWITCH  
 THE WAFERS ARE NUMBERED FROM THE ENDS END  
 OF THE SWITCH  
 SUFFIX F MEANS FRONT OF WAFER  
 SUFFIX B MEANS REAR OF WAFER  
 TONE CONTROLS ARE SHOWN IN THE FLAT POSITION

MALE PLUG FITTING  
 THE INPUT & FEED  
 SOCKET ON TL10 OR TL12  
 AMPLIFIERS  
 (VIEW OF OUTSIDE FACE)

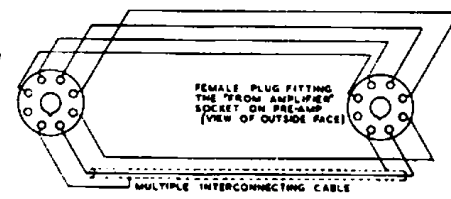

CIRCUIT DIAGRAM OF VARI-SLOPE II PRE-AMPLIFIER