


RESISTOR VALUES SHOWN IN OHMS
CAPACITOR VALUES IN MICRO-MICROFARADS
EXCEPT WHERE OTHERWISE SHOWN
VOLTAGES MEASURED ON A METER OF 1000Ω/VOLT

SWITCHES
 SW1 INPUT SELECTOR SWITCH
 SW2 BASS SWITCH
 SWT TREBLE SWITCH
 THE WAFERS ARE NUMBERED FROM THE ENDS END OF THE SWITCH
 SUFFIX F MEANS FRONT OF WAFER
 SUFFIX R MEANS REAR OF WAFER
 TONE CONTROLS ARE SHOWN IN THE FLAT POSITION

MALE PLUG FITTING
 THE INPUT & FEED
 SOCKET ON TL10 OR TL12
 AMPLIFIERS
 (VIEW OF OUTSIDE FACE)

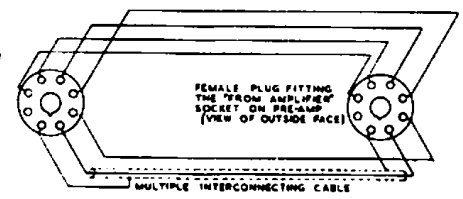

CIRCUIT DIAGRAM OF VARI-SLOPE II PRE-AMPLIFIER